

Nightstick is the preferred choice of professionals and discriminating consumers worldwide — recognized for high-performance, quality and value.

HEADLAMPS



INDUSTRIAL GRADE FOAM ADHESIVE

SLIP-RESISTANT CLIP

ELIMINATES STRAPS AND BANDS

BANDS

ZERO-BAND



90L
Multi-Function
◀ XPP-5450G
XPP-5450GC ▶
(mount only)



180L
◀ XPP-5452G
XPP-5452GC ▶
(mount only)



160L
Multi-Function
Dual-Light™
◀ XPP-5454G
XPP-5454GC ▶
(mount only)



175L
Multi-Function
Dual-Light™
◀ XPP-5456G
(red floodlight)



190L
◀ XPP-5458G
(green floodlight)



200L
Multi-Function
Dual-Light™
Low-Profile
◀ XPP-5460GX
XPP-5460GCX ▶
(mount only)



310L
DICATA™
Multi-Function
Dual-Light™
Low-Profile
◀ XPP-5462GX



250L
FORTEM™
Multi-Function
Dual-Light™
XPP-5466G
AVAILABLE IN



180L
Multi-Function
Dual-Light™
XPR-5560G ▶
(broad beam)



140L
Multi-Function
Dual-Light™
XPR-5561G ▶
(focused beam)

SAFETY CERTIFIED

- ✓ DUSTPROOF/WATERPROOF
- ✓ IMPACT & CHEMICAL RESISTANT
- ✓ CLASS I, DIVISION 1, GROUPS A-D, T3/T4, ZONE 0

	UL LISTED	ETL	Ex	IECEx	MSHA	INMETRO	NFPA	CE
HEADLAMPS								
XPP-5450G								
XPP-5450GC								
XPP-5452G								
XPP-5452GC								
XPP-5454G								
XPP-5454GC								
XPP-5456G								
XPP-5458G								
XPP-5460GX								
XPP-5460GCX								
XPP-5462GX								
XPP-5466G								
XPR-5560G								
XPR-5561G								
AREA LIGHTS								
XPP-5566GX								
XPR-5568GX								
XPP-5570GA								
XPR-5572GA								
XPR-5580G								
HANDLEDS								
XPP-5410G								
XPP-5412G								
XPP-5414GX								
XPP-5414GX-K01								
XPP-5418GX								
XPP-5418GX-K01								
XPP-5420G								
XPP-5420GX								
XPP-5422G								
XPP-5422GM								
XPP-5422GMX								
XPR-5522GM								
XPR-5542GMX								

AREA LIGHTS

ANGLE LIGHTS



205L
INTRANT™
Multi-Function
Dual-Light™
◀ XPP-5566GX
XPR-5568GX ▶
AVAILABLE IN



200L
Multi-Function
Dual-Light™
◀ XPP-5570GA
XPR-5572GA ▶
AVAILABLE IN




300L
VIRIBUS™
Multi-Function
Dual-Light™
◀ XPR-5580G
AVAILABLE IN

LANTERN



HANDLEDS

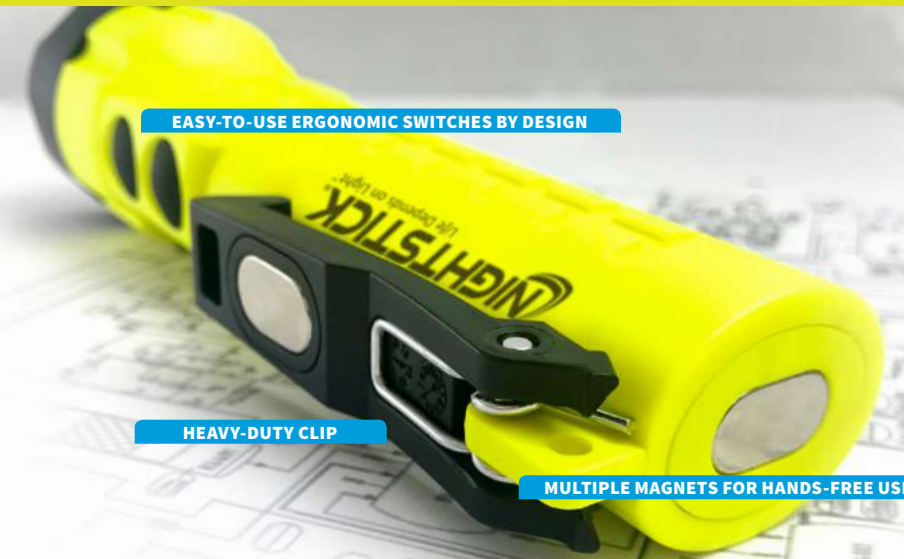

EASY-TO-USE ERGONOMIC SWITCHES BY DESIGN

HEAVY-DUTY CLIP

MULTIPLE MAGNETS FOR HANDS-FREE USE



Penlights
30L ◀ XPP-5410G
50L ◀ XPP-5412G



120L
Multi-Function
Dual-Light™
◀ XPP-5414GX
XPP-5414GX-K01
(mount kit)



200L
XPP-5418GX ▶
XPP-5418GX-K01 ▶
(mount kit)



140L
◀ XPP-5420G
AVAILABLE IN
210L
XPP-5420GX ▶



240L
Dual-Light™
◀ XPP-5422G
AVAILABLE IN
◀ XPP-5422GM
(with magnets)



285L
Dual-Light™
XPP-5422GX ▶
XPP-5422GMX ▶
(with magnets)



240L
Multi-Function
Dual-Light™
◀ XPR-5522GM
(with magnets)
400L
XPR-5542GMX ▶
(with tail magnet)



SAFETY FIRST

THE SCREW

This locking screw is required to ensure the ultimate user safety by deterring intentional or accidental battery exposure in a hazardous environment

THE MATERIAL

Glass nylon polymer material withstands extreme conditions

THE LENS

The polycarbonate lens is specifically designed and sealed to withstand virtually any environment

THE MAGNET

Limitless hands-free use in any critical situation

THE DUAL-LIGHT™

Lights up the immediate walking area along with a distance beam for maximum safety

THE CERTIFICATION MARK

Permissible Nightstick Flashlight/Floodlight	
1 MSHA APPROVAL No. 20-A130001-0	6 CE Mark
2 ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	7 INMETRO Certification
3 Intertek CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 Ex ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga	8 IECEx Certification
4 Ex ia I Ma Ex ia IIC T3 Ga	9 ATEX/IECEx Certification
5 Conforms to: ANSII/UL STD 913, ANSII/UL 60079-0, ANSII/UL 60079-11, ANSII/SA 60079-26	10 Tested Temperature Range
Certified to: CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25	

